


## Air Core Coil Features

- Air core inductors feature high Q and current handling
- Acrylic top provides a flat surface for pick and place
- Solder coated leads ensure reliable soldering
- Operating temperature range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Storage temperature range:  $-55^{\circ}\text{C}$  to  $+145^{\circ}\text{C}$

## Air Core Coil Inductor Dimensions & Configurations (Unit In mm)

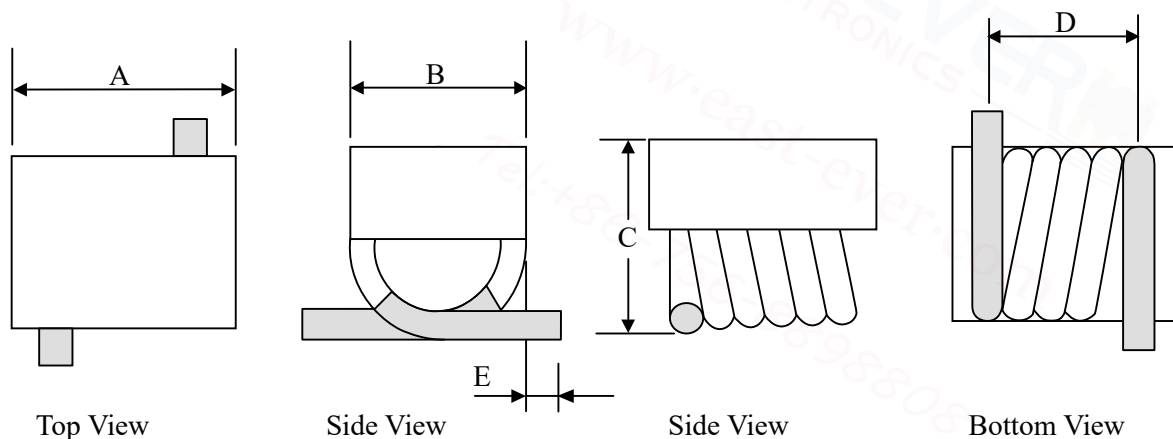

Top View

Side View

Side View

Bottom View

P/N Type

A

B

C

D

E

SMTAM2215

$2.2 \pm 0.3$

$1.4 \pm 0.2$

$1.4 \pm 0.2$


$1.8 \pm 0.3$

$0.9 \pm 0.3$

## Specification

Part Number	(A)Max	Inductance (nH)	Q(min)	Test Freq (MHz)	DCR (mΩ)Max	SRF(GHz)(min)
SMTAM2215 - 1N6J	1.6	1.65	100	800	4.0	>3.0
SMTAM2215 - 2N5J	1.6	2.55	100	800	5.0	>3.0
SMTAM2215 - 3N8J	1.6	3.85	100	800	6.0	>3.0
SMTAM2215 - 5N4J	1.6	5.45	100	800	8.0	>3.0

## Tape & Reel Information

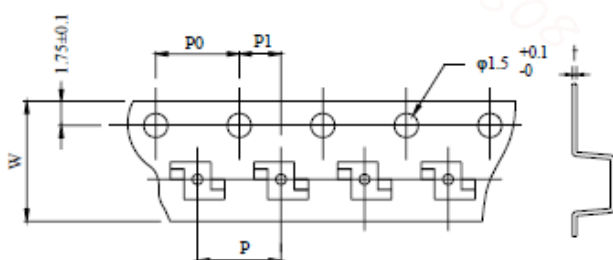

Parameter	Units	Value
Qty per reel	PCS	4000
Reel Size	mm	330
Tape Width	mm	12.00
P	mm	4.00
Po	mm	4.00
P1	mm	2.00